


Technical Specification



RPC-3.50

Calibration Kit
Plug

MCK26A-M

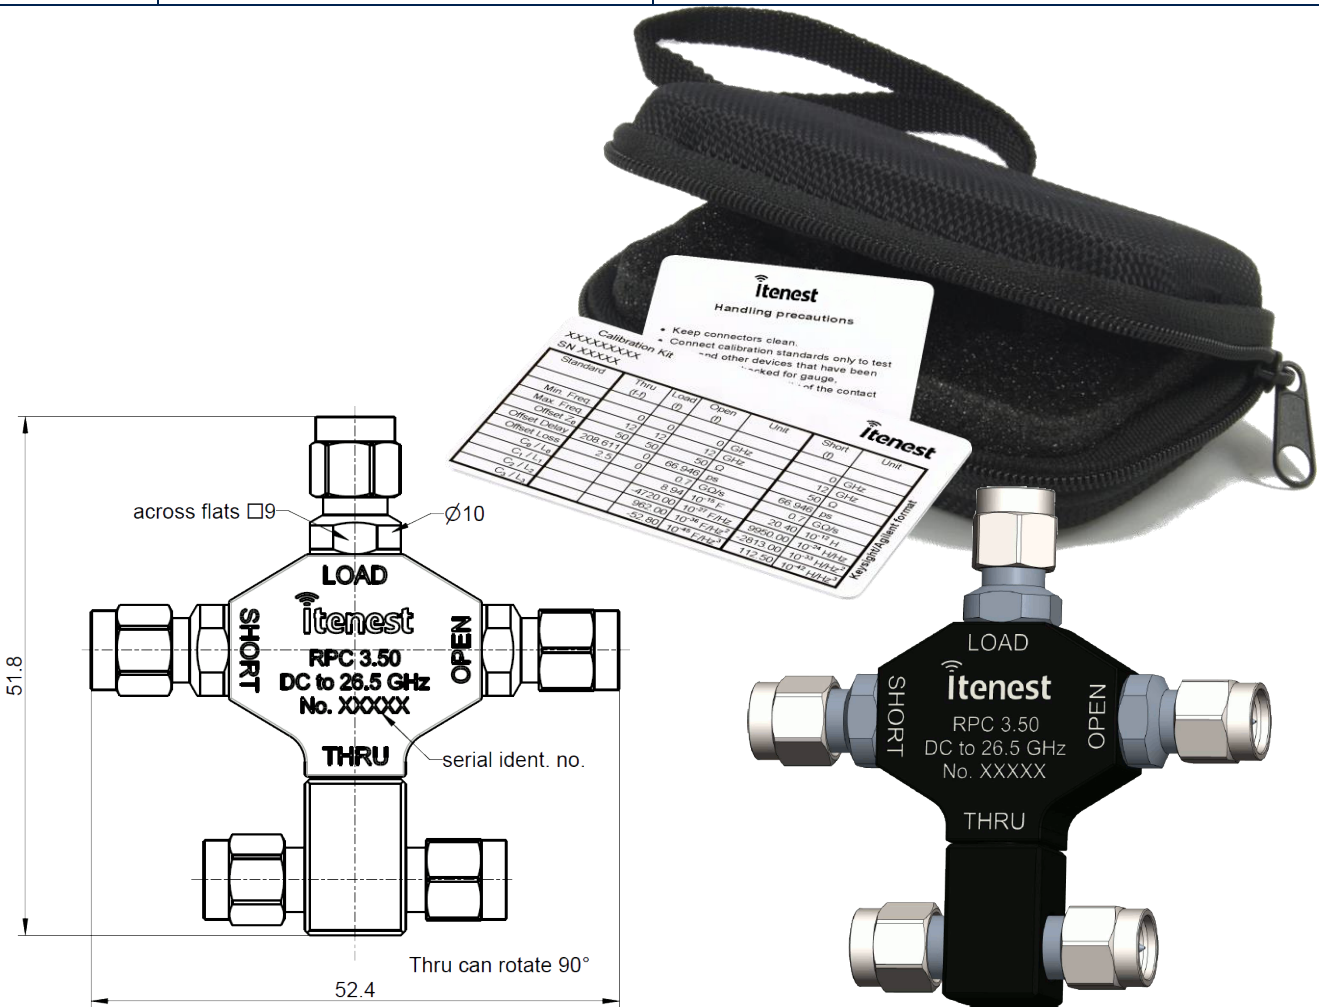

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-23
RPC-2.92 and SMA

Contents and Documentation

This kit is delivered with

- **Standard Definitions Card**
Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- **Test Results Documentation**
- **Hard Shell Case**
- **Protection Caps**

Material and plating

Connector parts

Center conductor
Outer conductor
Coupling nut
Body
Dielectric
Substrate

Material

CuBe
Stainless steel
Stainless steel
Aluminum
PS
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Passivated
Passivated
black anodized

Technical Specification



RPC-3.50

Calibration Kit
Plug

MCK26A-M

Electrical data

Frequency range DC to 26.5 GHz

Thru

Return loss

- ≥ 34 dB, DC to 4 GHz
- ≥ 32 dB, 4 GHz to 8 GHz
- ≥ 30 dB, 8 GHz to 26.5 GHz

Open

Error from nominal phase¹

- ≤ 1.0°, DC to 4 GHz
- ≤ 2.0°, 4 GHz to 8 GHz
- ≤ 3.0°, 8 GHz to 26.5 GHz

Short

Error from nominal phase²

- ≤ 1.0°, DC to 4 GHz
- ≤ 2.0°, 4 GHz to 8 GHz
- ≤ 3.0°, 8 GHz to 26.5 GHz

Load

Return loss

- ≥ 40.0 dB, DC to 4 GHz
- ≥ 35.0 dB, 4 GHz to 8 GHz
- ≥ 30.0 dB, 8 GHz to 26.5 GHz

DC Resistance

50 Ω ± 0.5 Ω

Power handling (at 25 °C, sea level)

≤ 0.5 W, derate by 0.005 W/K

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance**Mechanical data**

Mating cycles ≥ 500

Maximum torque 1.70 Nm

Recommended torque 0.90 Nm

Gauge 0.00 mm to 0.08 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Thru

Offset Z₀ / Impedance / Z₀ 50 Ω

Offset Delay 84.058 ps

Length (electrical) / Offset Length 25.20 mm

Offset Loss 2.51 GΩ/s

Loss 0.0183 dB/√GHz

Line Loss @ 1GHz 0.0007 dB/mm

Open

Offset Z₀ / Impedance / Z₀ 50 Ω

Offset Delay 33.356 ps

Length (electrical) / Offset Length 10.00 mm

Offset Loss 2.20 GΩ/s

Loss 0.0127 dB/√GHz

Fringing Capacitances

C ₀ = -17.000 x 10 ⁻¹⁵ F	/	-17.000 fF
C ₁ = -2000.0 x 10 ⁻²⁷ F/Hz	/	-2.0000 fF /GHz
C ₂ = 147.00 x 10 ⁻³⁶ F/Hz ²	/	0.1470 fF /GHz ²
C ₃ = -3.0000 x 10 ⁻⁴⁵ F/Hz ³	/	-0.0030 fF /GHz ³

Technical Specification

RPC-3.50

Calibration Kit
Plug

MCK26A-M

Short

Offset Z_0 / Impedance / Z_0	50 Ω		
Offset Delay	33.356 ps		
Length (electrical) / Offset Length	10.00 mm		
Offset Loss	2.36 G Ω /s		
Loss	0.0137 dB/ $\sqrt{\text{GHz}}$		
Short Inductance	$L_0 = -39.000 \times 10^{-12} \text{ H}$	/	-39.000 pH
	$L_1 = 2200.0 \times 10^{-24} \text{ H/Hz}$	/	2.2000 pH /GHz
	$L_2 = -150.00 \times 10^{-33} \text{ H/Hz}^2$	/	-0.1500 pH /GHz ²
	$L_3 = 3.0000 \times 10^{-42} \text{ H/Hz}^3$	/	0.0030 pH /GHz ³

Load

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	0.0000 ps
Length (electrical) / Offset Length	0.000 mm
Offset Loss	0.00 G Ω /s
Loss	0.0000 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range ³	+20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C
RoHS	compliant

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards.

Inspection interval

Recommendation	12 months
----------------	-----------

Packing

Standard	1 pce in bag
Weight	38.3 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Rev.

Date

100

22.08.22

iTest Technology Co., Ltd.

5C Building 1, Tingwei Industrial Park, No.6 Liufang Road, Area 67, Xingdong community, Xin'an street, Bao'an District, Shenzhen, China.

Tel: +86-755-2153 5646

www.itenest.com

Page

3 / 3