


Technical Specification



RPC-2.92

Calibration Kit
Plug

MCK43A-M

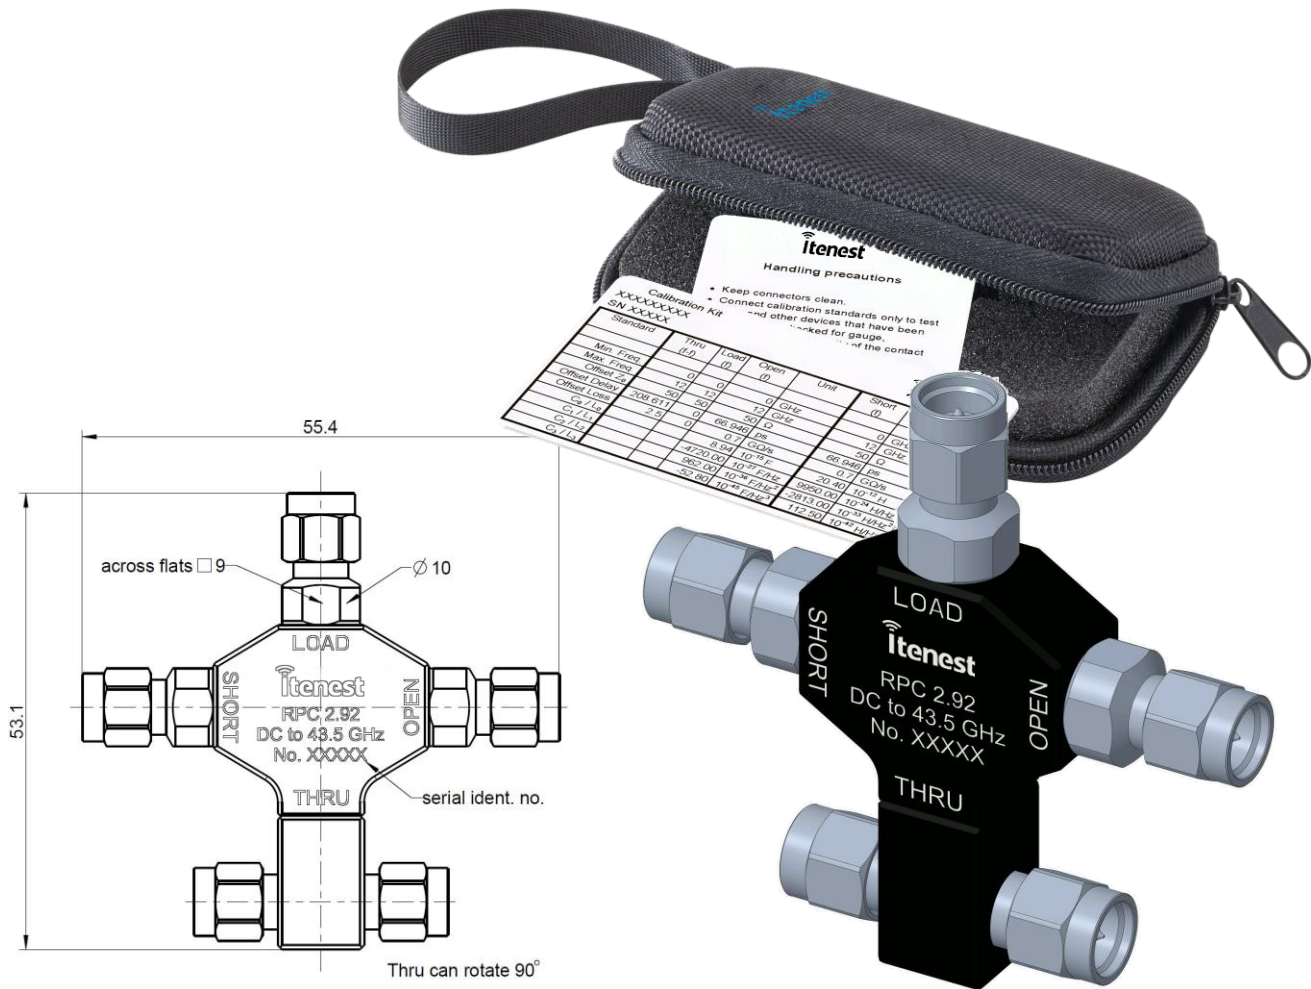

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-35
RPC-3.50 and SMA

Documents

This kit is delivered with

- **Standard Definitions Card**
Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- **Certificate of Testing**
- **Hard Shell Case**
- **Protection Caps**
- **User Manual**

Material and plating

Connector parts

Center conductor
Outer conductor
Coupling nut
Body
Dielectric
Substrate

Material

CuBe
Stainless steel
Stainless steel
Aluminum
PS
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Passivated
Passivated
black anodized

Technical Specification



RPC-2.92

Calibration Kit
Plug

MCK43A-M

Electrical data

Frequency range

DC to 43.5 GHz

Thru

Return loss

 ≥ 32 dB, DC to 4 GHz
 ≥ 30 dB, 4 GHz to 26.5 GHz
 ≥ 28 dB, 26.5 GHz to 43.5 GHz
OpenError from nominal phase¹
 $\leq 1.5^\circ$, DC to 4 GHz
 $\leq 4.0^\circ$, 4 GHz to 26.5 GHz
 $\leq 5.0^\circ$, 26.5 GHz to 43.5 GHz
ShortError from nominal phase²
 $\leq 1.5^\circ$, DC to 4 GHz
 $\leq 4.0^\circ$, 4 GHz to 26.5 GHz
 $\leq 5.0^\circ$, 26.5 GHz to 43.5 GHz
Load

Return loss

 ≥ 40.0 dB, DC to 4 GHz
 ≥ 28.0 dB, 4 GHz to 26.5 GHz
 ≥ 25.0 dB, 26.5 GHz to 43.5 GHz

DC Resistance

50 $\Omega \pm 0.5 \Omega$

Power handling (at 25 °C, sea level)

 ≤ 0.5 W, derate by 0.005 W/K¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances² The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance**Mechanical data**

Mating cycles

 ≥ 500

Maximum torque

1.70 Nm

Recommended torque

0.90 Nm

Gauge

0.00 mm to 0.08 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

ThruOffset Z_0 / Impedance / Z_0 50 Ω

Offset Delay

82.157 ps

Length (electrical) / Offset Length

24.63 mm

Offset Loss

2.70 G Ω /s

Loss

0.0193 dB/ $\sqrt{\text{GHz}}$

Line Loss @ 1GHz

0.0008 dB/mm

OpenOffset Z_0 / Impedance / Z_0 50 Ω

Offset Delay

28.353 ps

Length (electrical) / Offset Length

8.50 mm

Offset Loss

2.40 G Ω /s

Loss

0.0118 dB/ $\sqrt{\text{GHz}}$

Fringing Capacitances

 $C_0 = -10.6000 \times 10^{-15}$ F / -10.6000 fF

 $C_1 = -1130.00 \times 10^{-27}$ F/Hz / -1.13000 fF /GHz

 $C_2 = 52.0000 \times 10^{-36}$ F/Hz² / 0.05200 fF /GHz²
 $C_3 = -0.60000 \times 10^{-45}$ F/Hz³ / -0.00060 fF /GHz³

Technical Specification



RPC-2.92

Calibration Kit
Plug

MCK43A-M

Short

Offset Z_0 / Impedance / Z_0	50 Ω		
Offset Delay	28.353 ps		
Length (electrical) / Offset Length	8.50 mm		
Offset Loss	2.40 G Ω /s		
Loss	0.0118 dB/ $\sqrt{\text{GHz}}$		
Short Inductance	$L_0 = 0.0000 \times 10^{-12} \text{ H}$	/	0.0000 pH
	$L_1 = 0.0000 \times 10^{-24} \text{ H/Hz}$	/	0.0000 pH/GHz
	$L_2 = 0.0000 \times 10^{-33} \text{ H/Hz}^2$	/	0.0000 pH/GHz ²
	$L_3 = 0.0000 \times 10^{-42} \text{ H/Hz}^3$	/	0.0000 pH/GHz ³

Load

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	0.0000 ps
Length (electrical) / Offset Length	0.000 mm
Offset Loss	0.00 G Ω /s
Loss	0.0000 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range ³	+20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C
RoHS	compliant

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards.

Inspection interval

Recommendation	12 months
----------------	-----------

Packing

Weight	42 g/pce
--------	----------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Rev.

Date

b00

07.01.22

iTest Technology Co., Ltd.

5C Building 1, Tingwei Industrial Park, No.6 Liufang Road, Area 67, Xingdong community, Xin'an street, Bao'an District, Shenzhen, China.

Tel: +86-755-2153 5646

www.itenest.com

Page

3 / 3